


**Designed to work specifically in HPNA environments**

**Features:**


- **HPNA Compatible**
- **Low Port to Port Isolation**  
(for HPNA communications)
- **Meets SCTE Environmental and Mechanical Requirements**
- **Expanded Pass Band**  
(for future communication channels)

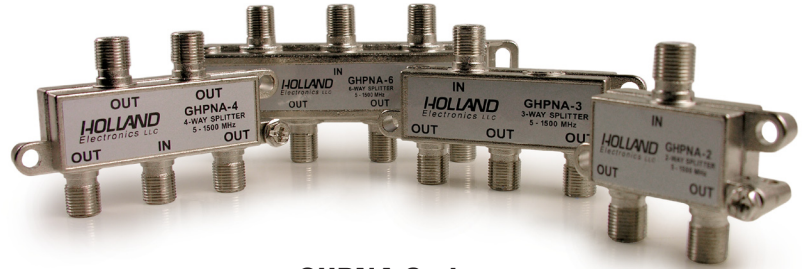

**GHPNA Series**

2-way, 3-way, 4-way and 6-way splitters

The Holland **GHPNA**-\* splitters have been specifically designed to work in HPNA environments. The low port to port isolation allows HPNA communication signals to pass through the splitters to set top boxes with as little signal loss as possible. At the same time the GHPNA Series splitters provide good return loss and isolation for in band frequencies other than HPNA.

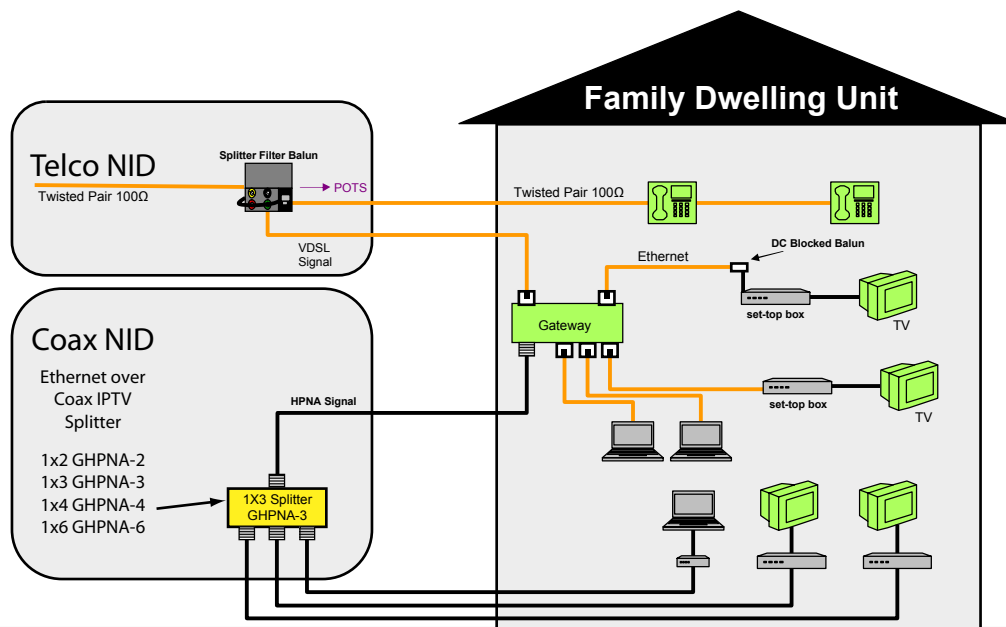

<b>GHPNA-2</b>	<b>Frequency Range (MHz)</b>	<b>QC</b>
<b>Insertion Loss (Max dB)</b>	4-1500MHz	8
<b>Return Loss Input (Min dB)</b>	4-1500MHz	12
<b>Return Loss Output (Min dB)</b>	4-1500MHz	12
<b>ISOLATION Out-out (Max dB)</b>	4-1500MHz	8
<b>GHPNA-3</b>		
<b>Insertion Loss (Max dB)</b>	4-1500MHz	10
<b>Return Loss Input (Min dB)</b>	4-1500MHz	12
<b>Return Loss Output (Min dB)</b>	4-1500MHz	12
<b>ISOLATION Out-out (Max dB)</b>	4-1500MHz	10
<b>GHPNA-4</b>		
<b>Insertion Loss (Max dB)</b>	4-1500MHz	12
<b>Return Loss Input (Min dB)</b>	4-1500MHz	12
<b>Return Loss Output (Min dB)</b>	4-1500MHz	12
<b>ISOLATION Out-out (Max dB)</b>	4-1500MHz	12
<b>GHPNA-6</b>		
<b>Insertion Loss (Max dB)</b>	4-1000MHz	15
	1000-1500MHz	15
<b>Return Loss Input (Min dB)</b>	4-1500MHz	12
<b>Return Loss Output (Min dB)</b>	4-1500MHz	12
<b>Isolation Out-out (Max dB)</b>	4-1000MHz	15
	1000-1500MHz	15

<b>HOUSING</b>	
<b>Plating:</b>	Nickel
<b>Backcover:</b>	Tin cover & solderback
<b>Pin:</b>	Round Pins w/ white insulators
<b>Screws:</b>	1 grounding and 2 mounting