


ABS Coaxial Cable Product Type: TX15AT77-FE Black

Series 15 Coaxial Cable
Copper Clad Aluminum Conductor
Foamed Polyethylene Dielectric
Bonded APA Laminate Shield
77% Aluminum Braid
APA Laminate Shield
Underground Floodant
Black Polyethylene Jacket

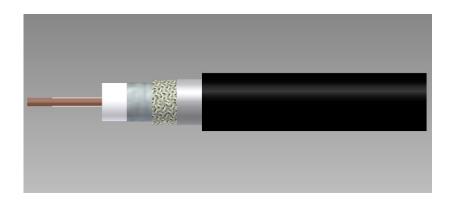

Cable Ordering Information

Part Number	Description	NEC / CSA Listing
015T77E00BK2910000R1	TX15AT77-FE Black	None

Characteristics

Characteristics			
Material	Detail	inches	mm
Inner Conductor	Copper Clad Aluminum	0.109	2.77
Dielectric	Foamed Polyethylene	0.455	11.56
1 st Outer Conductor	Sealed APA Tape	0.463	11.76
2 nd Outer Conductor	77% Aluminum Braid	0.490	12.45
3 rd Outer Conductor	APA Tape	0.494	12.55
Floodant	Underground		
Jacket	Polyethylene, Black	0.595	15.11
Twisted Pairs			
Messenger			
Mechanical Specifications			
Minimum Bend Radius, in. (mm)		2.0	(50.80)
Product Weight	(less reel)	86 lbs /kft	

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: tx15at77-fe black_1.8ghz18.docx

Revision: 01.08.2019 Page: 1 of 2

uncontrolled copy

All Rights Reserved,

Specifications subject to change without notice

Amphenol Broadband Solutions

358 Hall Avenue Wallingford, CT 06492 Toll Free +1-800-677-2288 Toll +1-434-432-1800 Fax +1-434-432-1821 www.timesfiber.com



ABS Coaxial Cable Product Type: TX15AT77-FE Black

Electrical Specifications					
Impedance, Ω	75 ± 3				
Velocity of Propagation, %	88				
Capacitance, Nominal	15.5 pF/ft	50.9 pF/m			
DC Resistance	Ω / kft	Ω/km			
Inner Conductor	1.35	4.43			
Outer Conductor	2.69	8.83			
Loop	4.04	13.25			

Attenuation, Maximum @ 68 °F (20 °C)					
Frequency, MHz	dB / 100 ft	dB / 100 m			
5	0.21	0.69			
55	0.60	1.97			
211	1.16	3.81			
250	1.26	4.13			
270	1.31	4.30			
300	1.39	4.56			
330	1.45	4.76			
350	1.50	4.92			
400	1.61	5.28			
450	1.71	5.61			
500	1.80	5.91			
550	1.90	6.23			
600	1.98	6.50			
750	2.23	7.32			
870	2.41	7.91			
1000	2.59	8.50			
1100	2.72	8.92			
1200	2.84	9.32			
1218	2.85	9.35			
1300	2.96	9.71			
1400	3.07	10.07			
1500	3.17	10.40			
1600	3.28	10.76			
1700	3.38	11.09			
1794	3.46	11.35			
1800	3.47	11.38			

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: tx15at77-fe black_1.8ghz18.docx

Revision: 01.08.2019 Page: 2 of 2

uncontrolled copy

All Rights Reserved,

Specifications subject to change without notice

Amphenol Broadband Solutions 358 Hall Avenue

Wallingford, CT 06492 Toll Free +1-800-677-2288 Toll +1-434-432-1800 Fax +1-434-432-1821 www.timesfiber.com